

product specifications for:

50A Wiring Devices

Item #: 6364CRV

Description

Connector, locking, corrosion-resistant

Electrical Specifications

50 amperes, 125/250 volts, 3-pole, 4-wire
Operating Temp: -40°C to +75°C (without impact).

Configuration

NEMA SS-2

Material Specifications

Housing Material: Nylon
Contact Material: Brass
Assembly screws: Stainless steel

Color

Yellow Housing

Terminals

Brass, lug style, Perma-Lock™ design. Accommodates up to 6 AWG wire.

Mechanical Specification


Overall Design: Two assembly screws.
Dust seal at cord entry.
Beveled housing.
Corrosion resistant.

Cord Clamp: Internal, self centering. Accommodates cable up to 1.2" (6/4 S).

Listings

UL listed, File E57672

CSA certified, File 81290_0_000

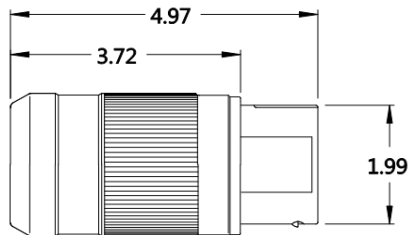

Dimensions shown in inches

toll free 800.307.6702 | park-power.com

ParkPower
by Marinco